


Hamilton 88 XL Technical Information

Standard Equipment

- 88% efficient
- Finned copper tube heat exchanger, ASME
- FM/CSD-1 compliant gas train (subject to local codes)
- Gasketless heat exchanger assembly
- Sealed combustion/direct vent
- Low NOx
- Full modulation with smooth 5:1 turndown
- Symmetrically air/fuel coupled
- Stainless steel jacket panels
- UV flame detection
- HeatNet control
- Variable speed blower
- Digital text annunciator
- Mounted & wired flow switch
- Quick-release service latches
- No de-rate to 6000 ft.
- Bronze headers (water heaters)
- Cast iron headers (boilers)

Optional Equipment

- Cupro-nickel finned tubes
- BACnet or LonWorks interface module
- Freeze protection package
- Honeywell keyboard display module S7800
- Outdoor sensor with housing
- Outdoor installation

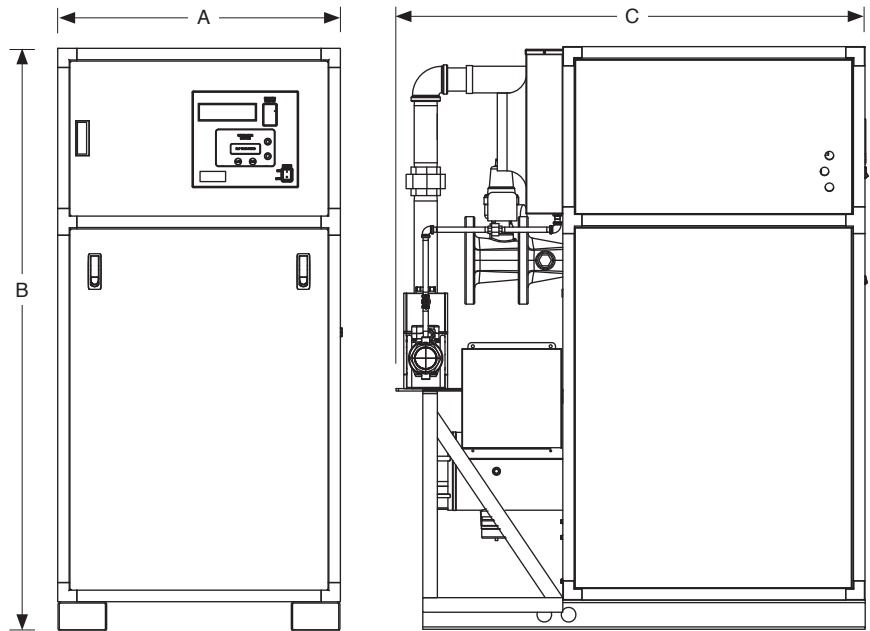

Model	Input MBTU/hr	Output MBTU/hr	GPH @ 100°F Recovery	Flue Vent	Inlet Air	Gas Conn.	Water Conn.	A	B	C	Shipping Weight
HF 2500	2,500	2,175	2611	8"	8"	1.5"	4"	29.13"	55.50"	50.25"	1300 lbs
HF 3000	3,000	2,610	3133	8"	8"	2.0"	4"	29.13"	60.00"	48.25"	1410 lbs
HF 3500	3,500	3,045	3655	10"	10"	2.0"	4"	29.50"	64.50"	48.25"	1510 lbs
HF 4000	4,000	3,480	4178	10"	10"	2.0"	4"	29.50"	69.00"	48.25"	1570 lbs
HF 5000	5,000	4,255	5,180	12"	12"	2.0"	4"	29.50"	78.00"	48.25"	2000 lbs

*Dimensions are approximate. Please consult factory before installation.



All models comply with
A S M E boiler code



All models comply with
A S M E boiler code

