



Hamilton Mini-Tube Technical Information

Standard Equipment

- 83% efficient
- Operating control
- Mounted ASME relief valve
- Built-in draft diverter
- Stainless steel burners
- Cast iron headers (boilers)
- Glass-lined headers (heaters)
- Inlet & outlet thermometers
- Mounted and wired flow switch
- Spark ignition
- FM/CSD-1 compliant gas train (subject to local codes)
- Self diagnostic light package
- Pump control
- 160 psi heat exchanger
- Field reversible heat exchanger

Optional Equipment

- Outdoor installation
- 4 pass heat exchanger
- Cupro-nickel heat exchanger
- Low water cut-off (probe type)
- Induced draft (up to 100 ft. horizontal)
- 2-stage firing
- 2:1 mechanical modulating firing mode
- Combustible floor pan

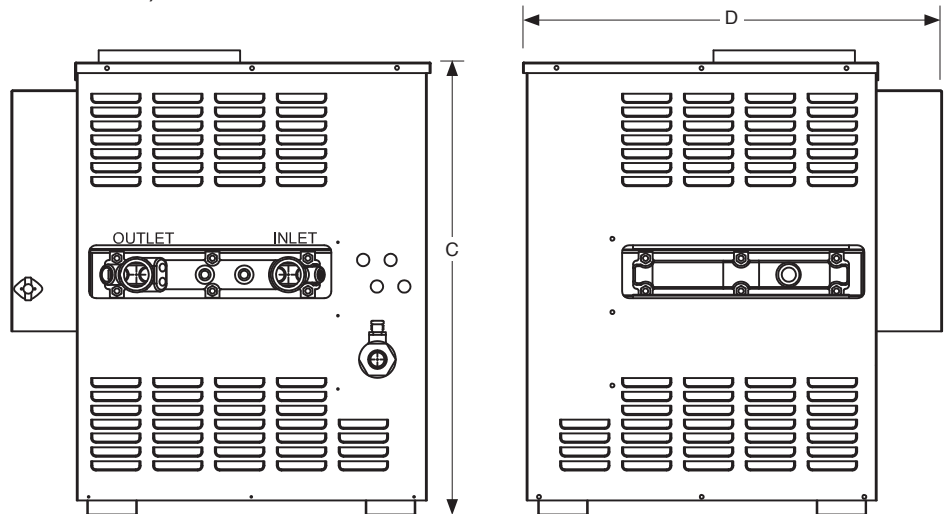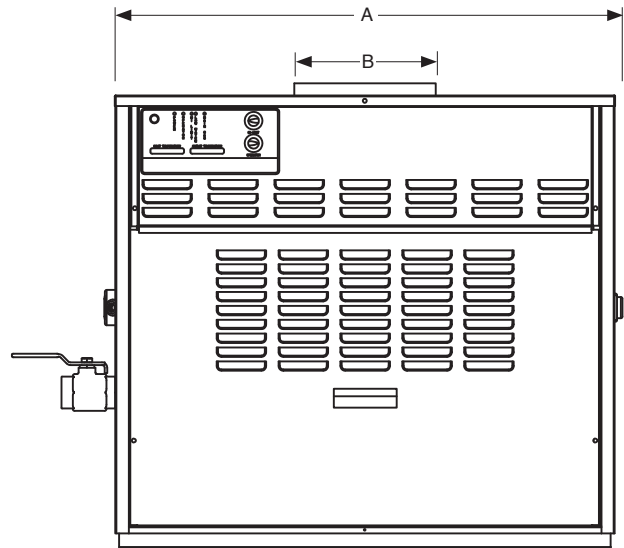

Model	Input MBTU/hr	Output MBTU/hr	GPH @ 100°F Recovery	Gas Conn.	Water Conn.	A	B (Exhaust Out)	C	D	Shipping Weight
HS 100	100	82	98	.5"	1.5"	16.13"	5"	32"	30"	150 lbs.
HS 150	150	123	148	.5"	1.5"	19.5"	6"	32"	30"	170 lbs.
HS 200	199	161	194	.5"	1.5"	22.88"	7"	32"	30"	190 lbs.
HS 250	250	203	243	.75"	1.5"	26.25"	8"	32"	30"	210 lbs.
HS 300	301	250	300	.75"	1.5"	29.63"	8"	32"	30"	230 lbs.
HS 350	350	291	349	.75"	1.5"	33.0"	9"	32"	30"	250 lbs.
HS 400	399	331	398	.75"	1.5"	35.38"	10"	32"	30"	300 lbs.

*Dimensions are approximate. Please consult factory before installation.

